

# UTX

U-Trough Auger



Built with resilience and longevity in mind – able to withstand the harshest physical demands



## FEATURES

- **Wear Edge Technology™** extends the life of the flighting
- Durable **Powder Coat Paint** protects the auger finish and repels rust
- **Removeable Tow Bar** easily connects and detaches from the hitch
- **Solid Tube Guard** completely encloses the driveline
- **Square One-Bolt Flight Connections** provide improved performance through positive torque transfer for smooth operation
- **Hydraulic Winch** helps raise and lower the auger with ease and precision
- **Triple Banded Belts** maintain speed by providing better tension with less slippage
- Sealed, grease-lubricated **Top Drive** comes with forged steel sprockets and heavy-duty chain, both protected by durable cover and designed to match the auger capacity
- **Top Drive Chain Tensioner** provides better adjustment capabilities and consistent chain drive tension
- **Driveshaft and Bearings** are constructed of durable oil impregnated hardwood for long, quiet operation and can be easily replaced without disassembling the driveshaft
- **Hose Routing** provides a cleaner, sleeker look, while protecting the hoses from the elements



### REVERSING GEARBOX

Comes with shifting linkage and lockout, allowing the operator to safely reverse the auger at all angles.



### COLLAPSING SPRING LOADED HOPPER EXTENSION

Quickly and easily fit under some of your lowest and hardest to reach bin unloads and hopper bins.




### HEAVY-DUTY SELF-PROPELLED MOVER KIT WITH JOYSTICK HYDRAULIC STEERING

The heavy-duty, self-propelled mover makes setting up at bins and moving around the yard fast and easy, so you can get the job done in less time.



### GAS MOTOR

Choose either a Vanguard or Kohler gas motor, with a large 44-liter gas tank that lets you work as long as you need to.



### WORK LIGHTS


LED work lights allow you to work later so you can get the job done sooner.



### TRIPLE-GROOVE ELECTRIC CLUTCH

Start and stop the auger without shutting down the gas engine drives.

AUGER SPECIFICATIONS	
TROUGH GAUGE	12 GA
TROUGH CONNECTORS	¼" FLANGE
MAIN FLIGHTING	10" OD X 7 GA STRETCHED + WELDED
INTAKE FLIGHTING	10" OD X 7 GA WELDED WITH WEAR EDGE TECHNOLOGY™
FLIGHTING SHAFT	2" OD X 0.120" WALL TUBING
DRIVESHAFT	1 - ½" OD X 10 GA TUBING
DRIVESHAFT BEARINGS	1 - ½" OIL IMPREGNATED HARDWOOD BEARINGS
TRACK	HIGH YIELD 11 GA ROLL FORMED
TRACK SHOE	2 - ¾" STEEL ROLLER
UNDERCARRIAGE	3" SQUARE TUBING
AXLES	2 - ½" SQUARE TUBING
HUB & WHEELS	4 BOLT AGRICULTURAL TYPE HUBS, 15" WHEEL
LIFT CABLE	¼" AIRCRAFT TYPE GALVANIZED STEEL CABLE
TIRES	15 AGRICULTURAL TIRES
TOP DRIVE	#80 ROLLER CHAIN & HARDENED STEEL SPROCKETS
TOP DRIVE BEARINGS	1 - ¼" PILLOW BLOCK
WINCH	REDUCTION GEAR WITH AUTOMOTIVE BRAKE
GEARBOX	FORMED STEEL GEARS WITH TAPERED ROLLER BEARINGS
WHEEL TREAD	96"
GAS HORSE POWER	37 - 38
CAPACITY	7,000 - 9,000 bph

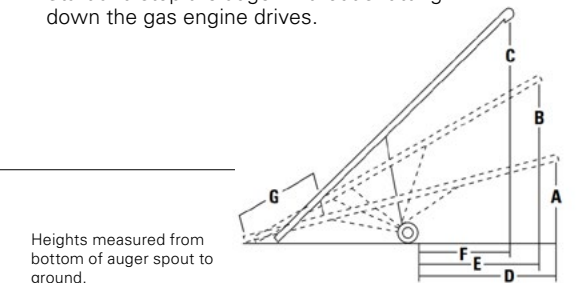

A	9' - 6"
B	14' - 1"
C	18' - 1"
D	14' - 5"
E	14' - 3"
F	13' - 9"
G	11'

DISCHARGE CLEARANCE DIMENSION		TRANSPORT DIMENSION	
MIN	9' - 6"	LENGTH	45' - 6"
MAX	18' - 1"	WIDTH	8'
HEIGHT	10' - 6"	HEIGHT	10' - 6"

WEIGHT	
HITCH WEIGHT (W/ ENGINE)	472 lbs
TOTAL WEIGHT (W/ ENGINE)	3,058 lbs

SPECIFICATION	
BELT SIZE	3B270



AGI is a leading provider of equipment solutions for agriculture bulk commodities including seed, fertilizer, grain, and feed systems with a growing platform in providing equipment and solutions for food processing facilities. AGI has manufacturing facilities in Canada, the United States, the United Kingdom, Brazil, South Africa and Italy and distributes its products globally.



Box 39, 74 Main Street, Rosenort, Manitoba, Canada R0G 1W0  
 1.866.467.7207 | sales@grainaugers.com